

ECO-CLEAR Series 2003

Acrylic "Edge lit" style Photo-luminescent Exit Sign

High & Low Level • UL924 Listed • Leed Credit Compliant

Project:
Type:
Catalog #:
By/Date:

PHOTOLUMINESCENT • SERIES 2003 • SAFER • LESS EXPENSIVE • SUSTAINABLE

Specification Features

Viewing Distance: 50 feet
 Operating Life: 25+ years
 Activation: 5 foot-candles from nearby artificial lighting
 Facing Plate: Ultra-clear acrylic. Optional mirror background with single faced signs. Mirror background standard with double-faced signs.
 Letter Color: Green illuminating with red outline.
 Directional: Optional adhesive arrows. Field applied.
 Mounting: Wall, flag or ceiling.
 Attachments: High quality brushed aluminum brackets.
 Dimensions: 8.5" high x 14.5" wide. 1/8" to 1/4" depth.
 Features: Attractive, non-electrical, non-radioactive. Low profile, explosion-proof, low maintenance.
 Warranty: 25 years limited.
 Green Attributes: LEED points EA1 & ID1. No power usage. No radioactivity. No hazardous materials. Minimal maintenance. Long life.
 Listing & Codes: Underwriter Laboratories UL924 standard, IBC, NFPA, US Military code compliant, Fire Marshal approved. ETL Listed

Active Safety's ECO-CLEAR Series 2003 photoluminescent exit signs are attractive and durable exit signs designed for areas that are complimented by the aesthetics of a clear acrylic "edge-lit" style sign: i.e. hotels, condos, schools, retail, offices and medical facilities.

Non-electrical, non-radioactive and non-hazardous, Active Safety's Series 2003 photoluminescent exit signs are well suited for LEED and other environmentally focused projects.

Photoluminescent operation means there are no electrical connections to engineer, procure and install. Once located adjacent to nearby artificial lighting, Active Safety's ECO-CLEAR Series 2003 photoluminescent exit signs will operate for 25+ years with minimal maintenance – no lamps, batteries or radioactive tubes to ever replace or expire.

Ordering Format (example: 2003 - SM - CM - NA)

FAMILY	FACES	MOUNTING	ARROWS
2003	<u>SC</u> - single clear <u>SM</u> - single mirror <u>DM</u> - double mirror	<u>WM</u> - wall mount <u>CM</u> - ceiling or flag mount	<u>NA</u> - none <u>1A</u> - one arrow <u>2A</u> - two arrows

Specification Description

High Level [or Low Level] Exit Sign. UL 924 listed. Photoluminescent, non-electrical, non-radioactive, 50 feet visibility rating, 25+ year life. Acrylic faceplate with rounded corners, green symbols outlined in red with [without] mirror background. Anodized aluminum mounting hardware. Arrows and faces as required consistent with ceiling, flag or wall mount configurations specified on project drawings. Active Safety Series 2003.



Ceiling Mount




Wall Mount


ECO-CLEAR 2003 Exit Sign

Product Dimensions and Installation Details


FLAG MOUNT

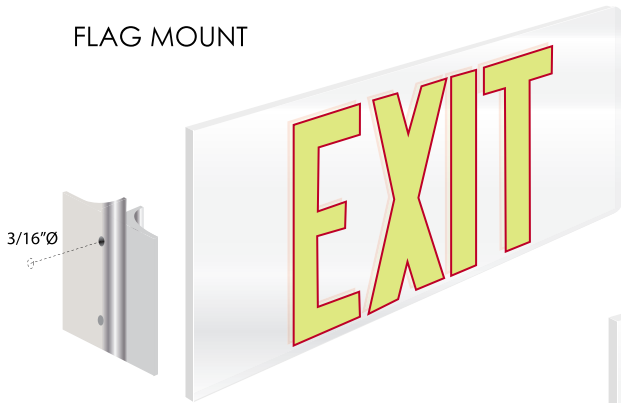

CEILING MOUNT

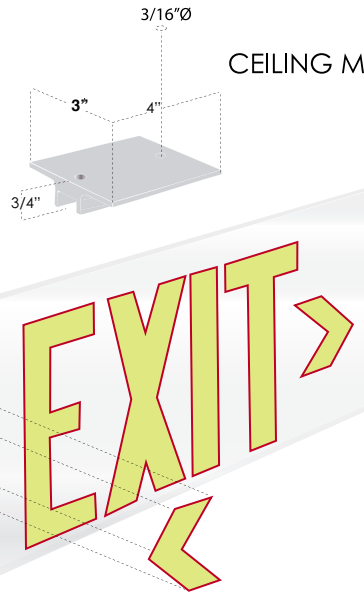

WALL MOUNT

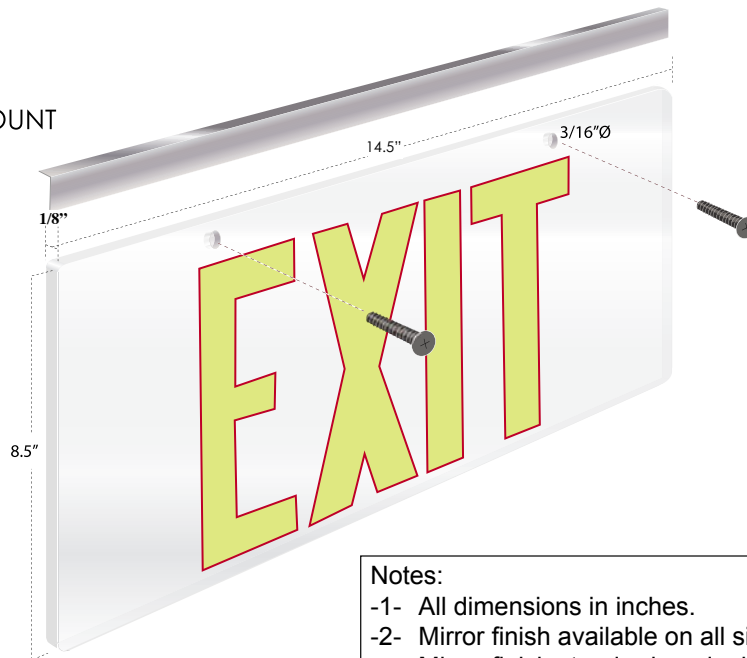

Notes:

- 1- All dimensions in inches.
- 2- Mirror finish available on all sign configurations.
Mirror finish standard on double sided sign.
- 3- Optional "adhesive backed" directional arrows are field applied.
- 4- Brackets are fixed to signs with included 1/16" hex-head screws.
- 5- Wall mount to substrate attachments included: 1/8" diameter woodscrews