

**ECO-CLEAR Series 2003**

**Acrylic "Edge lit" style Photo-luminescent Exit Sign**  
 High & Low Level • Complies to UL924 • Leed Credit Compliant

Project:  
 Type:  
 Catalog #:  
 By/Date:

PHOTOLUMINESCENT • SERIES 2003 • SAFER • LESS EXPENSIVE • SUSTAINABLE • SAFER • LESS EXPENSIVE

**Specification Features**

Viewing Distance:	50 feet
Operating Life:	25+ years
Activation:	5 foot-candles from nearby artificial lighting
Facing Plate:	Ultra-clear acrylic. Optional mirror background with single faced signs. Mirror background standard with double-faced signs.
Letter Color:	Green illuminating with red outline.
Directional:	Optional adhesive arrows. Field applied.
Mounting:	Wall, flag or ceiling.
Attachments:	Anodized aluminum bracket or trim piece.
Dimensions:	8.5" high x 14.5" wide. 1/8" to 1/4" depth.
Features:	Attractive, non-electrical, non-radioactive. Low profile, explosion-proof, low maintenance.
Warranty:	25 years limited.
Green Attributes:	LEED credit compliant. No power usage. No radioactivity. No hazardous materials. Minimal maintenance. Long life.
Listings & Codes:	ETL listed to UL924 standard (ETL). IBC, NFPA and US Military code compliant.

Active Safety's ECO-CLEAR Series 2003 photoluminescent exit signs are attractive and durable exit signs designed for areas that are complimented by the aesthetics of a clear acrylic "edge-lit" style sign: i.e. hotels, condos, schools, retail, offices and medical facilities.

Non-electrical, non-radioactive and non-hazardous, Active Safety's Series 2003 photoluminescent exit signs are well suited for LEED and other environmentally focused projects.

Photoluminescent operation means there are no electrical connections to engineer, procure and install. Once located adjacent to nearby artificial lighting, Active Safety's ECO-CLEAR Series 2003 photoluminescent exit signs will operate for 25+ years with minimal maintenance – no lamps, batteries or radioactive tubes to ever replace or expire.

**Ordering Format ( example: 2003 - SM - CM - NA )**

FAMILY	FACES	MOUNTING	ARROWS
2003	<u>SC</u> - single clear <u>SM</u> - single mirror <u>DM</u> - double mirror	<u>WM</u> - wall mount <u>CM</u> - ceiling or flag mount <u>PM</u> - pendant mount	<u>NA</u> - none <u>1A</u> - one arrow <u>2A</u> - two arrows

**Specification Description**

High Level [or Low Level] Exit Sign. ETL isted to UL 924. Photoluminescent, non-electrical, non-radioactive, 50 feet visibility rating, 25+ year life. Acrylic faceplate with rounded corners, green symbols outlined in red with [without] mirror background. Anodized aluminum mounting hardware. Arrows and faces as required consistent with ceiling, flag or wall mount configurations specified on project drawings. Active Safety Series 2003.



Ceiling Mount




Wall Mount


# ECO-CLEAR 2003 Exit Sign

## Product Dimensions and Installation Details


FLAG MOUNT

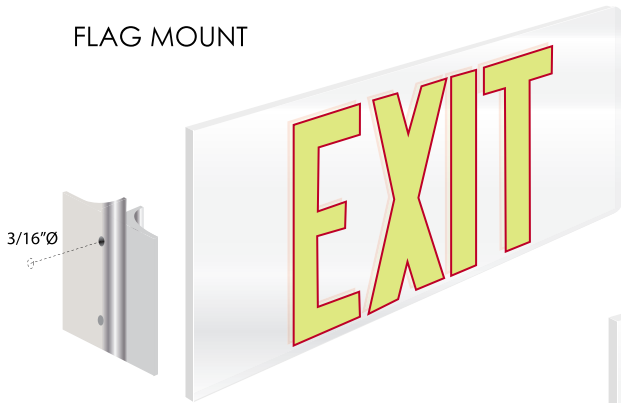

CEILING MOUNT

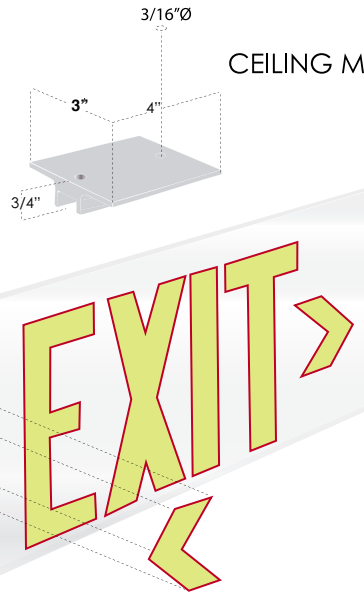

WALL MOUNT

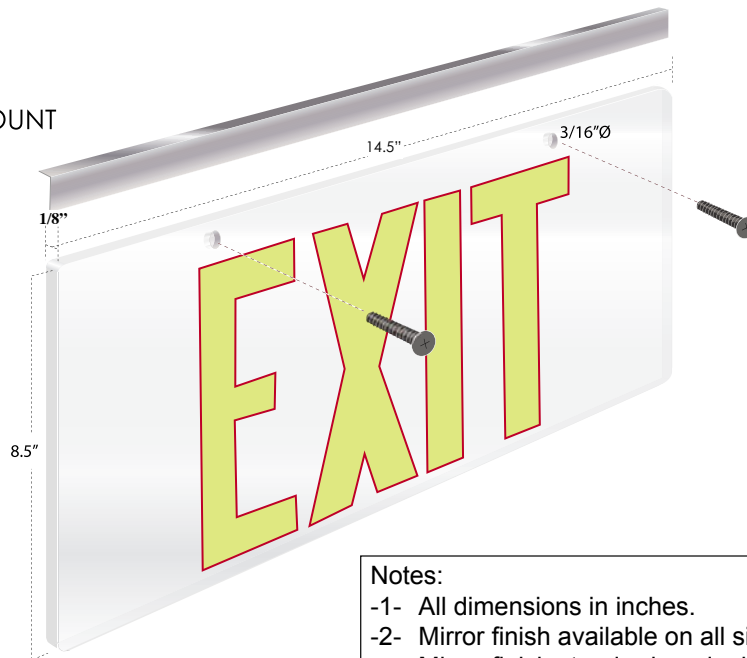

**Notes:**

- 1- All dimensions in inches.
- 2- Mirror finish available on all sign configurations.  
Mirror finish standard on double sided sign.
- 3- Optional "adhesive backed" directional arrows are field applied.
- 4- Brackets are fixed to signs with included 1/16" hex-head screws.
- 5- Wall mount to substrate attachments included: 1/8" diameter woodscrews