

Series 2001

Photoluminescent Exit Sign

High & Low Level • UL924 Listed • LEED Credit Compliant

Project:
Type:
Catalog #:
By/Date:

Specification Features

Viewing Distance:	50 feet
Operating Life:	25+ years
Activation:	5 foot-candles of fluorescent lighting
Face Plate:	Green illuminating heavy duty PVC
Frame:	Black anodized aluminum
Letter Color:	Red or Green
Directional:	Field applied arrows (optional)
Mounting:	Wall, Flag, or Ceiling
Attachments:	Tamperproof metal screws, wall mount
Dimensions:	Height: 8" Width: 15" Depth: 1/8" to 3/8"
Features:	Non-electrical, non-radioactive, low profile, explosion proof, low maintenance
Warranty:	Limited lifetime warranty.
Green Attributes:	Contributes to LEED points in EA1, MR4 or ID1. No power usage. No radioactivity. No hazardous materials.
Listings & Codes:	Minimal maintenance. Long life. Recyclable. Listed to UL924. Approved by California State Fire Marshal. Compliant to IBC, NFPA, IFC & UFC codes.

Active Safety's Series 2001 photoluminescent exit signs are specified by leading architects and engineers for applications requiring a durable, traditional style photoluminescent sign. Typical locations include hotels, condos, schools, retail, offices, hospitals, parking garages, US military facilities and other locations conforming to the IBC, NFPA and UFC codes.

Non-electrical and non-radioactive, Active Safety Series 2001 photoluminescent exit signs are a favorite with LEED and other environmentally focused projects.

Photoluminescent operation means there are no electrical connections to engineer, procure and install. Once located adjacent to fluorescent lighting, Active Safety Series 2001 photoluminescent exit signs will operate for 25+ years with only minimal maintenance - no lamps, batteries or radioactive tubes to ever replace or dispose of.

Ordering Format (example: 2001 – U – S – WM – R – 2A)

SERIES	STYLE	FACES	MOUNT LOCATION	LETTER COLOR	ARROWS
2001	'Blank' – black frame U - unframed	S – single D - double	WM – wall mount CM – ceiling or flag mount	R – Red G – Green	'Blank' – no arrows 1A - 1 arrow 2A – 2 arrows

Specification Description


High [or Low Level] Exit Sign. UL 924 listed. Photoluminescent, non-electrical, non-radioactive, 50 foot visibility rating, 25+ year life. Green illuminating heavy duty PVC construction with black anodized frame and 'field applied' arrows. Single and double sided face configurations consistent with ceiling, flag or wall mount applications as specified on project drawings. Matching bracket for ceiling and flag mount applications. **Active Safety Series 2001.**



PHOTOLUMINESCENT • SERIES 2001 • SUSTAINABLE • SAFER • LESS EXPENSIVE

Series 2001 Exit Sign

Product Dimensions and Installation Details

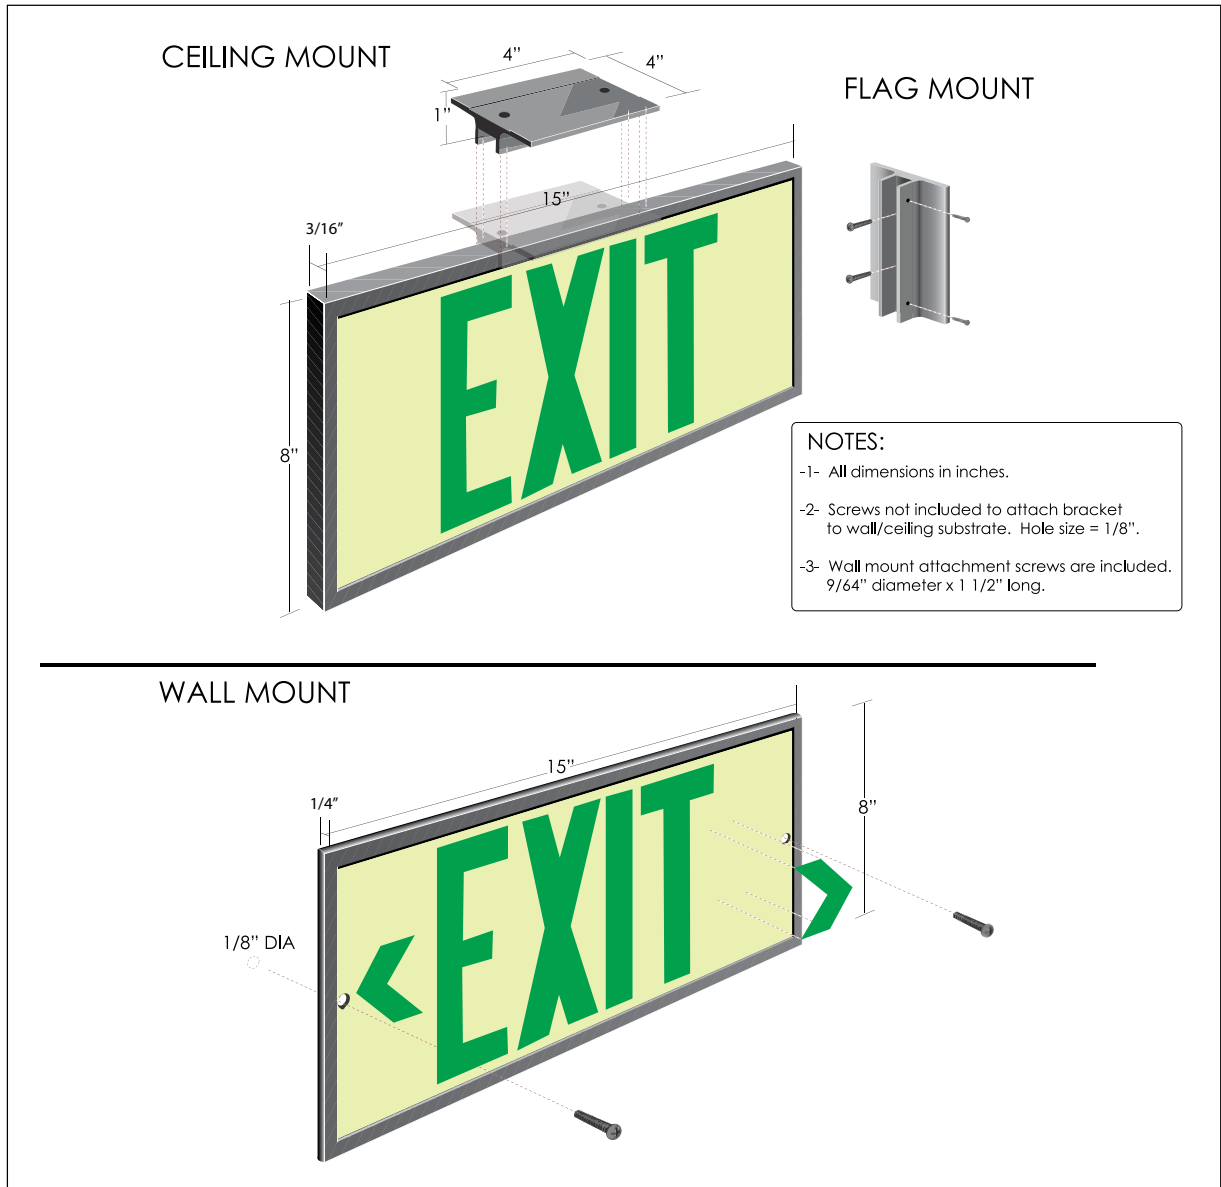

Attributes

- Non-electrical and non-radioactive. Activated by nearby light.
- Use instead of LED or Tritium in high and low exit sign locations.
- Durable and attractive 'traditional' design lasts 25+ years.
- Ceiling, wall, and flag mounting options. 50 foot viewing distance.
- Easy, quick installation – no electrical circuitry.
- Minimal maintenance – no lamps or batteries to replace.
- "Green", sustainable construction and operation. A favorite with LEED projects.
- UL924 listed. Energy Star listed. IBC,NFPA and US Military compliant. Fire Marshal approved.