

Series 2001

Photoluminescent Exit Sign

High & Low Level • UL924 Listed • LEED Credit Compliant

Specification Features

Viewing Distance:	50 feet
Operating Life:	25+ years
Activation:	5 foot-candles of fluorescent lighting
Face Plate:	Green illuminating heavy duty PVC
Frame:	Black anodized aluminum
Letter Color:	Red or Green
Directional:	Field applied arrows (optional)
Mounting:	Wall, Flag, or Ceiling
Attachments:	Tamperproof metal screws
Dimensions:	8" high x 15" wide. 1/8" to 3/8" depth.
Features:	Non-electrical, non-radioactive, low profile, explosion proof, low maintenance
Warranty:	25 years limited.
Green Attributes:	LEED points in EA1, MR4 & ID1. No power usage. No radioactivity. High percentage of recycled material. No hazardous materials. Minimal maintenance. Long life. Recyclable.
Listing Reports:	UL 924 (SA12885) • ICC - ESR1409 Intertek Testing Servie (ETL) J99026743-001A State of California Fire Marshal - 6200-1632:100 LA Research Report - RR25083

Project:
Type:
Catalog #:
By/Date:

Active Safety's Series 2001 photoluminescent exit signs are specified by leading architects and engineers for applications requiring a durable, traditional style photoluminescent sign. Typical locations include hotels, condos, schools, retail, offices, hospitals, parking garages, US military facilities and other locations conforming to the IBC, NFPA and UFC codes.

Non-electrical and non-radioactive, Active Safety Series 2001 photoluminescent exit signs are a favorite with LEED [EA1, MR4 and ID1] and other environmentally focused projects.

Photoluminescent operation means there are no electrical connections to engineer, procure and install. Once located adjacent to fluorescent lighting, Active Safety Series 2001 photoluminescent exit signs will operate for 25+ years with only minimal maintenance - no lamps, batteries or radioactive tubes to ever replace or dispose of.


ORDERING FORMAT

FAMILY	STYLE	FACES	MOUNT LOCATION	LETTER COLOR	ARROWS
2001	'Blank' - black frame U - unframed	S - single D - double	WM - wall mount CM - ceiling or flag mount	R - Red G - Green	'Blank' - no arrows 1A - 1 arrow 2A - 2 arrows



Series 2001 Exit Sign

Product Dimensions and Installation Details

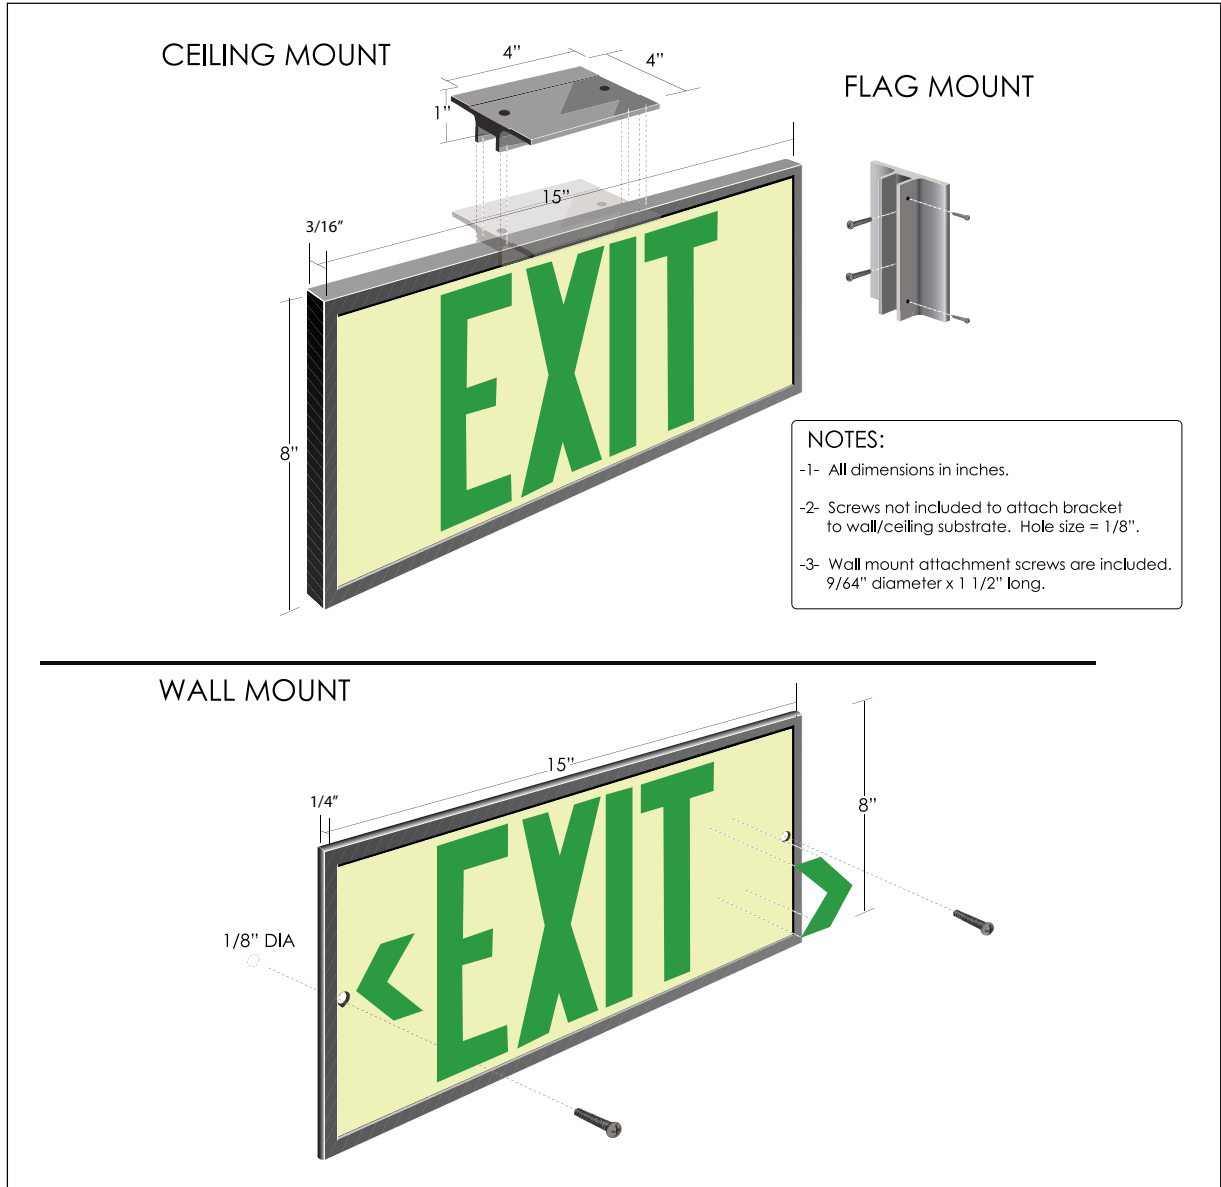

Attributes

- Non-electrical and non-radioactive. Activated by nearby light.
- Use instead of LED or Tritium in high and low exit sign locations.
- Durable and attractive 'traditional' design lasts 25+ years.
- Ceiling, wall, and flag mounting options. 50 foot viewing distance.
- Easy, quick installation – no electrical circuitry.
- Minimal maintenance – no lamps or batteries to replace.
- "Green", sustainable construction and operation. A favorite with LEED projects.
- UL924 listed. Energy Star listed. IBC,NFPA and US Military compliant. Fire Marshal approved.