

**NON-ELECTRICAL
NON-RADIOACTIVE**

ACTIVE



SAFETY™


Utah 800.657.6324 fax: 801.265.9943
California 888.375.9684 fax: 831.625.8650
www.activesafety.com

Series 15.000

Floor Level Exit Sign

Features & Specifications

- Marker Size:** 7" height
12" width
1/8" depth single-face
1/4" depth double-face
- Letter Size:** 3/4" stroke with 6" height
- Letter Color:** Dark Green or Red
- Background:** Green Illuminating
- Mounting:** Surface, end or ceiling
- Activation:** 3-5 foot candles ambient lighting
- Directional:** Optional field applied vinyl arrows
- Life Expectancy:** Twenty-five years+
- Construction:** Self-illuminating polystyrene laminate
- Attributes:** Non-electrical, non-radioactive, explosion proof, low maintenance
- Listing Reports:** ICC - ESR1409
Los Angeles Research Report #RR-25083-T
US Test Report #182556-1
- Model:** Wall Mount - single face
Green Letters 15.000 SWMG
Red Letters 15.000 SWMR

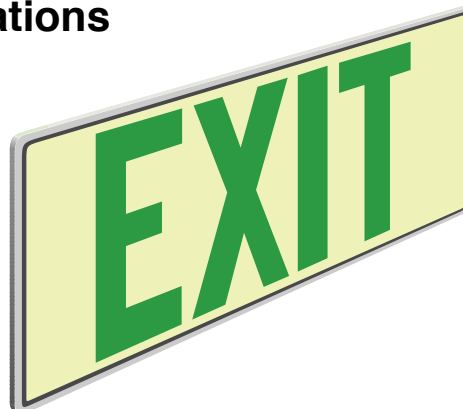

**USE ACTIVE SAFETY'S EXIT
MODELS 2001 & 2002
FOR 924 APPLICATIONS**

Series 14.000

Floor Level Exit Sign

Features & Specifications



**USE ACTIVE SAFETY'S EXIT
MODELS 2001 & 2002
FOR 924 APPLICATIONS**

- Marker Size:** 7" height
13" width
1/8" depth
- Letter Size:** 1" stroke with 6" height
- Letter Color:** Green Illuminating
- Background:** Black, Brushed Aluminum, White or Custom Finish
- Mounting:** Flush Wall Mount
- Activation:** 3-5 foot candles ambient lighting
- Directional:** Pop-out arrows
- Construction:** Stencilled aluminum face plate, bevelled edges & photo-luminescent text
- Life Expectancy:** Twenty-five years+
- Attributes:** Non-electrical, non-radioactive, explosion proof, low maintenance
ASTM E162 flame spread index : 22.88
- Listing Reports:** ICC - ESR1409
LA Research Report #RR-25083-T
US Test Report #182556-1
- Model:** Wall Mount - single face
Brushed Aluminum 14.000 SWMA
White 14.000 SWMW
Black 14.000 SWMB