



ACTIVE SAFETY

SAFER • LESS EXPENSIVE • SUSTAINABLE

USA 800.657.6324

www.activesafety.com

Project:
Contact:
Catalog #:
Date:

Series 300 Photoluminescent Hand Rail Marker

Features

Viewing Distance: 25 feet
 Operating Life: 25+ years
 Activation: 1 footcandle of artificial lighting including LED and Fluorescent.
 Marker Composition: Durable photoluminescent coating on PVC & Aluminum.
 Marker Color: Green illuminating color on aluminum.
 Mounting: Field applied adhesive
 Dimensions: Width: 1/2" & 1", Length: 10' Flat, 12' Curved. Custom sizes, curved or flat.
 Features: Flat and curved profiles for stair handrails. Non-electric. Non-radioactive. No hazardous materials. Easy installation onto a variety of substrates. Automatic operation. Durable. Explosion-proof.
 Warranty: Limited lifetime.
 Green Attributes: Non-electric. Non-radioactive. No hazardous materials. Long life. Near-zero maintenance.
 Listings and Codes: UL 1994 listed. IBC, IFC and NFPA Compliant.


Active Safety's Series 300 Handrail Marker is a durable aluminum strip with a photoluminescent coating that installs directly onto curved or flat handrails in exit pathways. Available in curved and flat profiles, the marker requires the use of an adhesive for permanent installations. Designed for stairwells and exit passageways requiring a high quality finished appearance, especially in areas with a high traffic load.

Ordering Format (example: 300 – AL – 1/2 – 12 CU)

SERIES	BACKING	WIDTH	LENGTH
300	AL - Aluminum PVC - PVC	1/2 – 1/2" 1 – 1"	10 F – 10' flat 12 CU – 12' curved

Specification Description

Active Safety's Series 300 Hand Rail Marker. Listed to UL 1994. Compliant to IBC, IFC and NFPA codes. Photoluminescent, non-electrical, non-radioactive. PVC & aluminum with photoluminescent surface. 25 foot visibility rating with 1 footcandle of charging illumination. Flat or curved profiles. **Active Safety Series 300.**

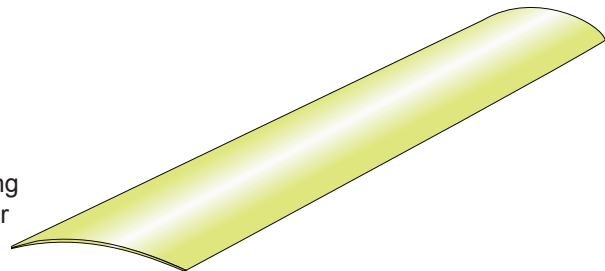

PHOTOLUMINESCENT • SERIES 300 • SUSTAINABLE • SAFER • LESS EXPENSIVE