

ACTIVE SAFETY

SAFER • LESS EXPENSIVE • SUSTAINABLE

USA 800.657.6324

www.activesafety.com

Project:

Contact:

Catalog #:

Date:

Series 310 Photoluminescent Obstacle Marker

Features

Viewing Distance:	25 feet	Active Safety's Series 310 Obstacle Marker is a durable rigid aluminum strip that installs directly onto obstacles in exit pathways. Available in curved and flat profiles, the marker has alternating black and yellow photoluminescent stripes. The optional adhesive tape backing facilitates application and provides a permanent installation. Designed for stairwells and exit passageways requiring a high quality finished appearance, especially in areas with a high traffic load.
Operating Life:	25+ years	
Activation:	1 footcandle of artificial lighting including LED and Fluorescent.	
Marker Composition:	Durable photoluminescent coating on aluminum for curved and pvc for flat	
Marker Color:	High glow-green illuminating with black stripe.	
Mounting:	Optional adhesive back.	
Dimensions:	Width = 1/2" or 1".	
Profile:	Flat or Curved profiles.	
Features:	Non-electric. Non-radioactive. No hazardous materials. Easy installation onto a variety of substrates. Automatic operation. Durable. Explosion-proof.	
Warranty:	5 years on materials, 25 years on glowing.	
Green Attributes:	Non-electric. Non-radioactive. No hazardous materials. Long life. Near - zero maintenance.	
Listings and Codes:	Listed to UL 1994. IBC, IFC & NFPA compliant.	

Ordering Format (example: 310 – ALA – C – 1/2 – 42)

SERIES	CONSTRUCTION	PROFILE	WIDTH	LENGTH
310 – Obstacle Marker	AL - Aluminum [no adhesive backing] Curved	E - Flat	1/2 - 1/2"	48 - 48" *
	PVCA - PVC with adhesive flat profile	C - Curved	1 - 1.0"	6 - 6' **

* Flat in 48" • ** Curved in 6'


Specification Description

Photoluminescent Obstacle Marker. UL 1994 Listed. Compliant to IBC, NFPA & IFC Codes. Non-electrical, non-radioactive, photoluminescent operation. Rigid aluminum [flat or curved] strip with alternating 1" wide photoluminescent and black stripes [with or without] adhesive backing. [1" or 2"] width by 42" long. 25 foot visibility with 1 footcandle of charging illumination.

Active Safety Series 310. [Bracket denotes options]



Flat

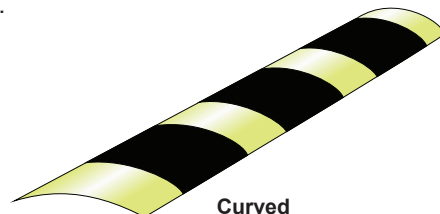

Curved