

# ACTIVE SAFETY

SAFER • LESS EXPENSIVE • SUSTAINABLE

**USA 800.657.6324**

**www.activesafety.com**

Project:  
Arch:  
Catalog #:  
Date:

## Series 520 DOOR HANDLE MARKER



520 - 4" x 4"

**PUSH TO OPEN**

520 - 1" x 16"

### Features

Viewing Distance: 25 feet  
 Color: Green Illuminating  
 Mounting: Flush Door Mount  
 Activation: 1 foot candle ambient lighting  
 Construction: Self-illuminating polystyrene laminate  
 Life Expectancy: Twenty-five years+  
 Attributes: Non-electrical, non-radioactive, explosion proof, low maintenance  
 Listing Reports: Compliant to UL 1994

### Ordering Format (example: 520 – BL – 4 – PVC )


SERIES	MODEL	DIMENSIONS	BACKING
<u>520</u>	<u>BL</u> - Block	<u>4</u> - 4" x 4"	<u>PVC</u> – Plastic with adhesive backing
<u>520</u>	<u>ST</u> - Strip	<u>1</u> - 1" x 16" <u>2</u> - 2" x 16"	<u>PVC</u> – Plastic with adhesive backing

### Features

Viewing Distance: 25 feet  
 Operating Life: 25+ years  
 Activation: 1 footcandle of fluorescent illumination  
 Marker Composition: Durable aluminum  
 Marker Color: Yellow-green illuminating  
 Mounting: Factory applied adhesive backing or client applied construction adhesive  
 Dimensions: Width: 1/2" - 1", length: 20 or 27 ft.  
 Features: Non-electric. Non-radioactive. No hazardous materials. Automatic operation. Easy installation onto a variety of substrates. Durable. Explosion-proof.  
 Warranty: Limited lifetime  
 Listings and Codes: UL 1994 listed. IBC, IFC & NFPA compliant

## Series 530

### Door and Handle Marker Kit

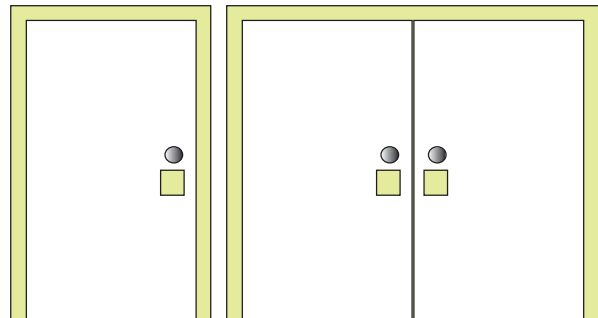

### Ordering Format (example: 530 – AL – 1 – S )

SERIES	BACKING	WIDTH	LENGTH
<u>530</u>	<u>PVC</u> – Plastic with adhesive backing	<u>1/2</u> – 1/2" <u>1</u> – 1.0"	<u>S</u> – single door 20ft <u>D</u> – double door 27ft