



USA 800.657.6324
www.activesafety.com

Project:
 Arch:
 Catalog #:
 Date:

ECO-CLEAR Series 2003

Acrylic "Edge lit" style • Photoluminescent Exit Sign

Specification Features

Viewing Distance:	50 feet
Operating Life:	25+ years
Activation:	5 foot-candles from nearby artificial lighting
Facing Plate:	Ultra-clear acrylic. Optional mirror background with single faced signs. Mirror background standard with double-faced signs.
Letter Color:	Green illuminating with red outline.
Directional:	Optional adhesive arrows. Field applied.
Mounting:	Wall, flag or ceiling.
Attachments:	Anodized aluminum bracket or trim piece.
Dimensions:	8.5" high x 14.5" wide. 1/8" to 1/4" depth.
Features:	Elegant Architectural Designs. Non-electrical, non-radioactive. low profile, explosion-proof, low maintenance, No hazardous materials.
Warranty:	Lifetime limited warranty.
Green Attributes:	NO radioactivity. No power usage. Near Zero maintenance.
Listings & Codes:	Listed to UL924 • Approved by California State Fire Marshal • Compliant to IBC, NFPA, IFC & UFC codes

Active Safety's ECO-CLEAR Series 2003 photoluminescent exit signs are attractive and durable exit signs designed for areas that are complimented by the aesthetics of a clear acrylic "edge-lit" style sign: i.e. hotels, condos, schools, retail, offices and medical facilities.

Non-electrical, non-radioactive and non-hazardous, Active Safety's Series 2003 photoluminescent exit signs are well suited for LEED™ and other environmentally focused projects.

Photoluminescent operation means there are no electrical connections to engineer, procure and install. Once located adjacent to nearby artificial lighting, Active Safety's ECO-CLEAR Series 2003 photoluminescent exit signs will operate for 25+ years with minimal maintenance – no lamps, batteries or radioactive tubes to ever replace or expire.

Ordering Format (example: Active Safety 2003 - SM - CM - NA)

SERIES	FACES	MOUNTING	ARROWS
2003	<u>SC</u> – single clear <u>SM</u> – single mirror <u>DM</u> – double mirror	<u>WM</u> – wall mount <u>CM</u> – ceiling or flag mount <u>PM</u> – pendant mount*	<u>NA</u> – none <u>1A</u> – one arrow <u>2A</u> – two arrows

* PM only includes S hooks. Cables supplied by contractor.

Specification Description

High Level [or Low Level] Exit Sign listed to UL 924. Photoluminescent, non-electrical, non-radioactive, 50 foot visibility rating, 25+ year life. Ultra-clear acrylic faceplate with rounded corners, engraved border accent, green symbols outlined in red with [without] mirror background. Anodized aluminum mounting hardware. Arrows and faces as required consistent with ceiling, flag or wall mount configurations specified on project drawings.


Active Safety Series 2003.




ECO-CLEAR 2003 Exit Sign

Product Dimensions and Installation Details


FLAG MOUNT

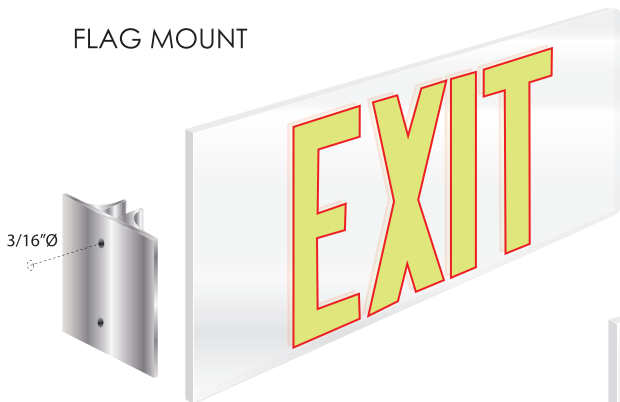

CEILING MOUNT

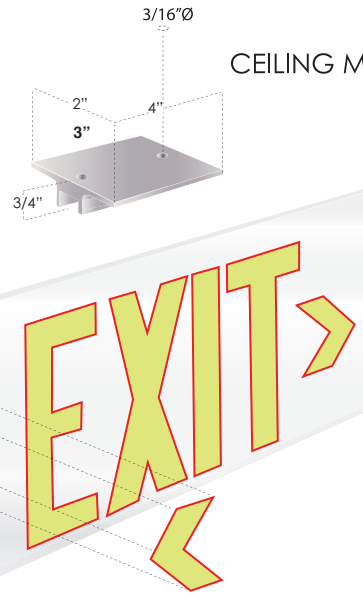

PENDANT or WALL MOUNT

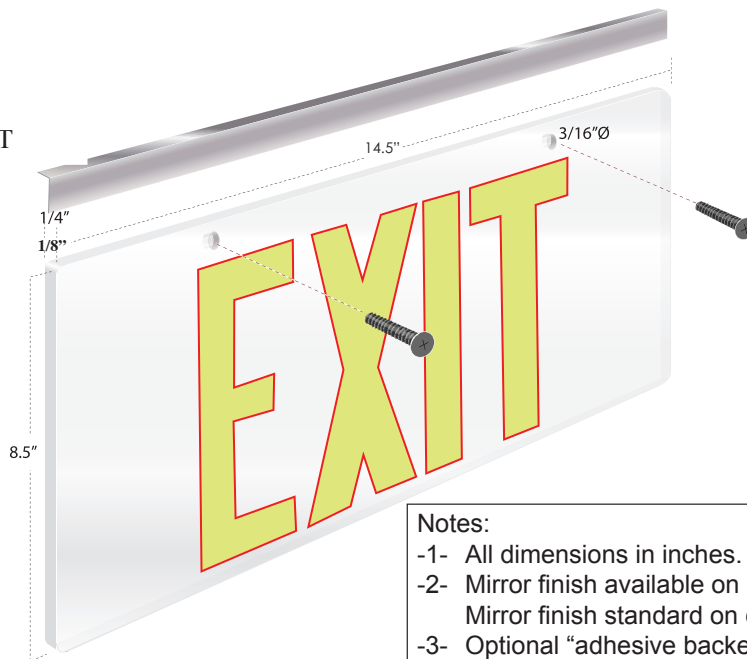

Notes:

- 1- All dimensions in inches.
- 2- Mirror finish available on all sign configurations.
Mirror finish standard on double sided sign.
- 3- Optional "adhesive backed" directional arrows are field applied.
- 4- Brackets are fixed to signs with included 1/16" hex-head screws.
- 5- Wall mount to substrate attachments included: 1/8" diameter wood screws

Pendant Mount Notes:

- 1- No trim pieces or screws
- 2- Pendant materials supplied by installer [chain, cable, etc]



**ACTIVE
SAFETY**

5 East 4800 South • Murray, Utah 84107
USA 800 657 6324 • 801 265 9943 fax
www.activesafety.com