



ACTIVE SAFETY

SAFER • LESS EXPENSIVE • SUSTAINABLE

USA 800.657.6324

www.activesafety.com

Project:

Contact:

Catalog #:

Date:

200 Series

Photoluminescent Stair Nosing Marker

Features


| | |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Viewing Distance: | 25 feet |
| Viewing Distance: | 25 feet |
| Operating Life: | 25+ years |
| Activation: | 1 footcandle of artificial lighting including LED and Fluorescent. |
| Marker Composition: | Durable aluminum extrusion with photoluminescent stripe. Anti-slip metal seration or optional anti-slip strip. |
| Marker Color: | Yellow-green illuminating. |
| Mounting: | Client field applied construction adhesive and screws. |
| Dimensions: | Photoluminescent stripe width: 1/2", 1". Length: 36", 48" or custom. Overall profile width varies from 2.35" with bull-nosing. |
| Warranty: | Limited 10 years on materials, 25 years on glow. |
| Green Attributes: | Non-electric. Non-radioactive. No hazardous materials. Long life. Near-zero maintenance. |

Active Safety 200 Series Stair Nosing Marker.

A durable "bullnose" shaped extrusion that installs directly onto the leading edge of new and existing stairs in building exit path stairwells. Several model variations provide for a high quality installation consistent with building architecture and occupant traffic patterns. Automatic operation requires only 1 footcandle of charging illumination under normal conditions. Long life and near zero maintenance ensure the system will always be available to support tenant safety during normal operations and emergencies.

Ordering Format (example: 200 – A L – F – 1/2 – 48)

| SERIES | CONSTRUCTION | PROFILE | PHOTOLUMINESCENT STRIPE WIDTH | LENGTH |
|--------------------------|------------------------------------------------------------------------------------------------------|---------------|-------------------------------|------------------------|
| 200 - Stair Tread Marker | AL - Aluminum ALSB - Aluminum w/ black anti-slip strip ALSG - Aluminum w/ grey anti-slip strip | E - 90 degree | 1/2 - 1/2" 1 - 1" | 48 - 48" C - Custom |

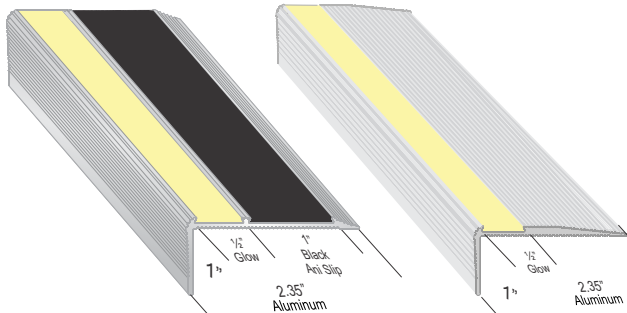

Specification Description

Photoluminescent Bullnose Stair Nosing Marker. UL 1994 Listed. Compliant to IBC, NFPA & IFC Codes. Non-electrical, non-radioactive photoluminescent operation. Durable bullnose satin anodized aluminum extrusion is [48" or custom] long and comes [with/without a non-skid stripe]. Photoluminescent stripe is [1/2" or 1"] wide. 25 foot visibility with 1 footcandle of charging illumination.

Active Safety 200 Series.

Specifications Subject to change.