

Project:
Contact:
Catalog #:
Date:

500 Series

Photoluminescent Floor Identification Sign

Features


Viewing Distance: 25 feet
Operating Life: 25+ years
Activation: 1 footcandle of artificial lighting: LED & Fluorescent.
Sign Composition: PVC Placard.
Sign Color: Yellow-green illuminating background with black letters.
Mounting: Client supplied screws or glue.
Dimensions: Width: 12", Height: 18", or custom.
Features: UV Stable. Easy installation. Automatic operation. Durable. Minimal maintenance
Warranty: Limited 10 years on materials, 25 years on glow.
Green Attributes: Non-electrical, non radioactive, no hazardous materials.
Listings and Codes: UL 1994 listed, IBC, IFC & NFPA compliant.

Active Safety 500 Series Floor Identification Sign.

A durable PVC placard that installs directly onto the walls of exit pathways. Available in standard or custom sizes and with Braille script to accommodate floor information consistent with local building codes. Automatic operation requires only 1 footcandle of charging illumination under normal conditions. Long life and near-zero maintenance ensure the system will always be available to support client safety during normal operations and emergencies.

Ordering Format (example: 500 – PVC – 1812 – B)

SERIES	MATERIAL	DIMENSIONS	BRAILLE
500 - Floor Identification Sign	PVC – Plastic	1812 – 18" high x 12" wide C – Custom	B - Braille script NB – no Braille script

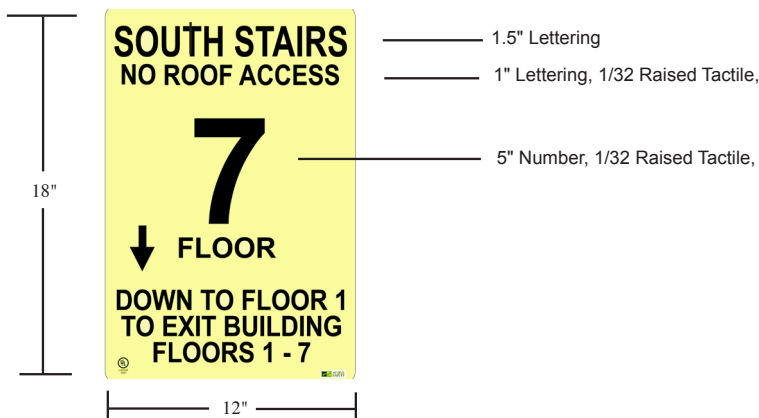

Specification Description

Photoluminescent Floor Identification Sign. UL 1994 Listed. Compliant to IBC, NFPA & IFC codes. Non-electrical, non-radioactive PVC sign with photoluminescent background, black lettering [and Braille script]. 25 foot visibility with 1 footcandle of charging illumination.

Active Safety 500 Series.
Specifications subject to change.