



**ACTIVE
SAFETY**

SAFER • LESS EXPENSIVE • SUSTAINABLE

USA 800.657.6324

www.activesafety.com

Project:
Contact:
Catalog #:
Date:

725 Series

Photoluminescent Stair Marker

Features


Viewing Distance:	25 feet
Operating Life:	25+ years
Activation:	1 footcandle of fluorescent illumination.
Marker Composition:	Vinyl tape, anti-slip with adhesive back.
Marker Color:	Yellow-green illuminating.
Mounting:	High quality adhesive.
Dimensions:	Width: 1" or 2", Length: 82 ft.
Features:	Easy installation. Automatic operation. Durable. Near-zero maintenance. Long life.
Warranty:	Limited 1 year materials & 25 year on glow.
Green Attributes:	Non-electric, non-radioactive, low maintenance, long life.
Listings and Codes:	UL 1994 listed. IBC, IFC & NFPA compliant.

Active Safety 725 Series.

A photoluminescent anti-slip exit path marker which is a durable vinyl tape designed for egress corridors, stairwells and other locations requiring a flexible, high adhesive tape.

Ordering Format (example: 725 -1 - 82)

Series	Width	Length
<u>725</u>	<u>1</u> - 1.0" <u>2</u> - 2.0"	<u>82</u> - 82 ft

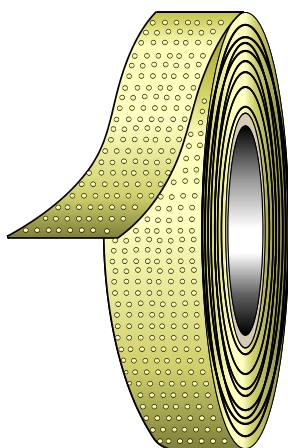

Specification Description

Low level exit pathway marker. Compliant to UL 1994. Photoluminescent, anti-slip, non-electrical, non-radioactive. 25 feet visibility rating, 25 year life. Polyester tape with high quality adhesive back. Yellow-green illuminating color.

Active Safety 725 Series.

Specifications subject to change!